

IST UV units for KBA MetalPrint MetalStar PR (KBA printing devices) (MetalStar 2)



It is important to maximise the production possibilities that new automation provides. IST UV solutions are designed with optimum reliability as a priority and this is achieved by incorporating outstanding heat management possibilities and total production flexibility.

The UV package for KBA MetalPrint MetalStar PR (KBA printing devices)

• URS® inlay reflector technology

URS® reflectors are what are known as cold mirror reflectors, fitted with more than 60 different metal oxide layers that only reflect the UV light and deflect the thermal radiation to a water-cooled profile. These highly resistant reflectors boast an extremely long service life and optimum heat management.

The reflector inlays are force-fitted to the unit, facilitating an easy replacement of the half shells. For example, simple replacement of the reflectors is interesting if the curing result can be improved by a different reflector geometry or coating for specific printing jobs.



• Cooling System


Water-cooling of the shutters and reflectors ensures that excess heat is efficiently carried out of the press. Also, the integrated air-cooling provides for optimized output of the UV lamp as well as removing small traces of ozone.

• Stepless power control of UV lamp output

In relation to the speed of the press, the SLC-control can vary the lamp output infinitely between 40 and 100%. In stand-by operation, the UV lamp output is reduced automatically and can remain in stand-by mode indefinitely.


• Flexible interchange of UV interdeck units

When required, the UV interdeck units can be moved to different positions. A mechanical preparation of the respective printing station ensures easy movability.

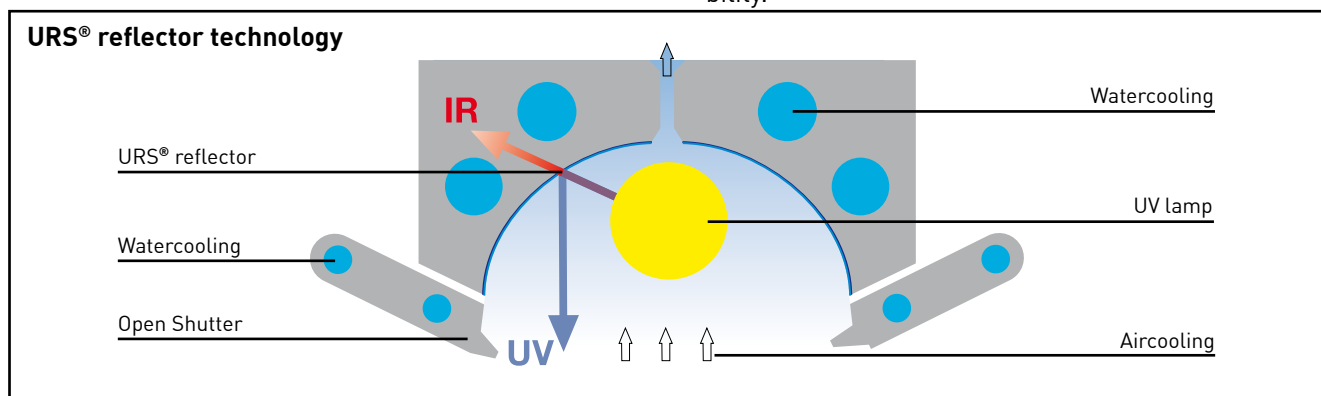


• Operator friendly with Smart Control

Complete operation of the UV unit is managed by the Smart Control terminal, which is installed adjacent to the control desk of the press.

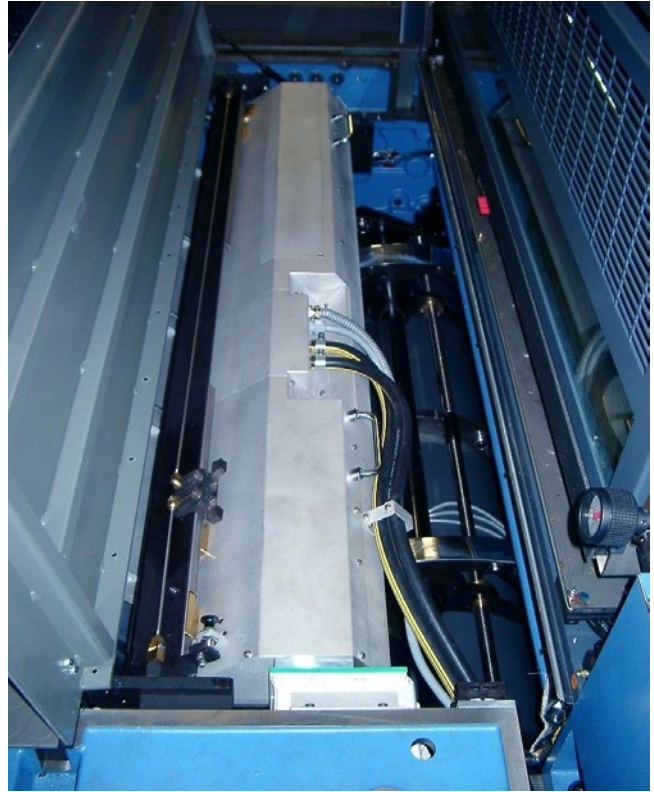

UV interdeck curing

- UV unit placed on support brackets
- Upward removal between print units
- Plug-in power connections on the drive side

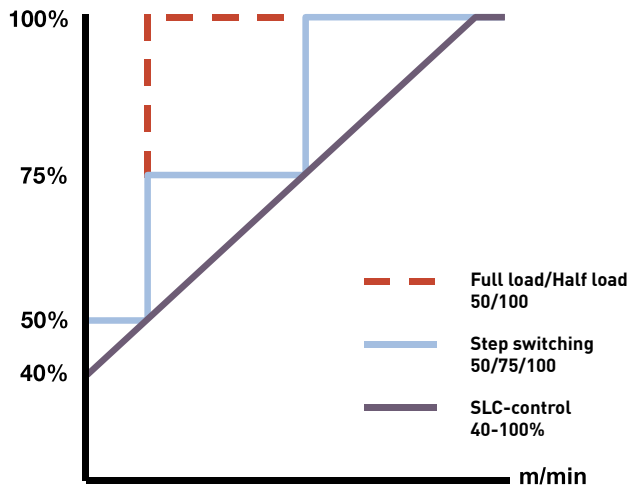

SLC Power control (electrical lamp control (ELC) available)

Also in our programme

- UV Set-Stack units
- UV Undercure units
- UV Pre-Coater



Typical Set-Stack Unit

F804 04/18 EN Subject to technical modifications Products marked with ® are registered trademarks of IST METZ

Head Office: IST METZ GmbH, Lauterstrasse 14-18, 72622 Nuertingen, Germany, Tel.: +49 7022 6002-0, Fax: +49 7022 6002-76, info@ist-uv.com

IST France sarl
info@fr.ist-uv.com

IST Italia S.r.l.
info@it.ist-uv.com

IST America Corp.
info@usa.ist-uv.com

UV-IST Ibérica SL
info@es.ist-uv.com

IST East Asia Co., Ltd.
info@ist-uv.jp

IST (UK) Limited
info@uk.ist-uv.com

IST Benelux B.V.
info@bnl.ist-uv.com

IST Nordic AB
info@se.ist-uv.com

IST METZ SEA Co., Ltd.
info@th.ist-uv.com

**IST METZ UV Equipment
China Ltd. Co.**
info@cn.ist-uv.com

For more information: www.ist-uv.com